

# Chain link mesh

Product code: CCSK

Product specification: 50mm nominal diamond mesh

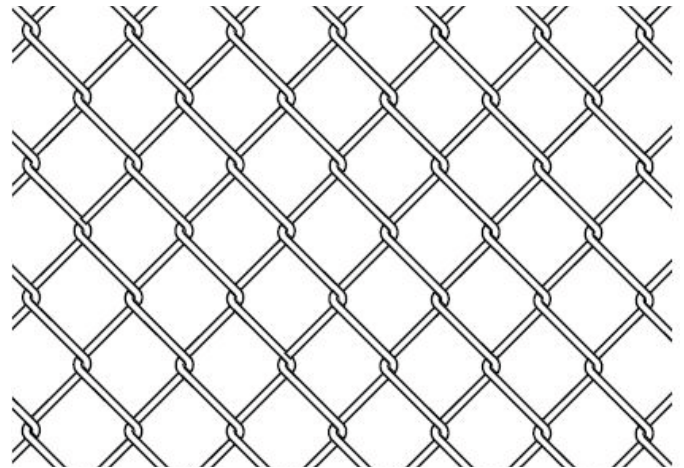
Category: Chain link mesh

## Introduction

CCSK chain link mesh enhances safety by providing surface support on mine roofs and ribs. Made from helically wound wire pickets forming a durable 50mm diamond pattern, the mesh offers consistent rock bolt alignment and is easy to handle and transport.

## Key features

- Supplied in a variety of roll size configurations to suit customers specific mine drive dimensions and ground conditions
- Provides consistency of rock bolt patterns
- Knuckle selvedge end
- Easy to handle and transport



## Product code guide

Type	Length	Width	Packaging
CCSK	10	5	CEN

## Physical properties

Typical yield strength of wire	Minimum ultimate strength wire	Coatings
450 MPa	500 MPa	Galvanised, Heavy Galvanised, PVC Coated

Roll length	Roll width	Wire diameter	Diamond size
10,000 mm	1,200 mm	2.5 mm	50 mm
20,000 mm	3,000 mm	3.15 mm	50mm

## Standard length and packaging




- Standard length rolls 10 m and 20 m
- Standard width rolls 1.8 m and 2.4 m

## Note

- Quality Assured to ISO 9001:2015

**Product accessoires examples**

We manufacture a comprehensive range of products specifically designed for this mesh.

Product group	Butterfly plate	Thread bar	Bolts
Product imagery			
Product code	BUTT	TB	AKH

**Mobile App**

Discover more! Explore our full product range, knowledge center, and additional details through the "DSI Underground" App—available now on iOS and Android.



iOS



Android

**Legal disclaimer**

All dimensions, weights, quantities, and specifications are those applicable at the time of this publication and may be amended from time to time. Please contact your local representative for final confirmation of any key specifications.